

build
more,
emit
less CO₂



build
light,
build **right**



Omyasphere 200

Omyasphere 400

Omya's lightweighting and insulation solutions for effortless, efficient, and more sustainable applications



THINKING OF TOMORROW

Omyasphere® Product Portfolio

Many applications, one portfolio: Omyasphere series


Omyasphere is a solution portfolio based on closed-cell expanded perlite to support your applications.

You can choose from:

- **Omyasphere 200** closed-cell expanded perlite.
- **Omyasphere 400** higher resistance closed-cell expanded perlite.

Omyasphere is ideal to **support carbon footprint reduction**. Omyasphere also helps reduce thermal conductivity and related energy consumption, for improved well-being and resource consumption reduction. Lower weight also means CO₂ emissions reduction during transportation of the end products.

Omyasphere facilitates the recycling of building materials.



The power of light Sustainability

Microspheres have become more widely adopted and popular in the construction sector, driven by a fast, increasing demand for more sustainable, more efficient and effortless end products. Such engineered minerals not only help reduce weight, but they can also make application easier, lower transportation costs and footprint and improve insulation.


Why choosing LWF

- *Thermal insulation*
- *Carbon footprint reduction*
- *Weight reduction*
- *Higher yield*
- *Workability & sandability*
- *Dimensional stability*


Omyasphere: which product is right for me?

Which product to choose from the Omyasphere range? Here is an overview guide to help you make an initial decision.

Omyasphere portfolio: market position

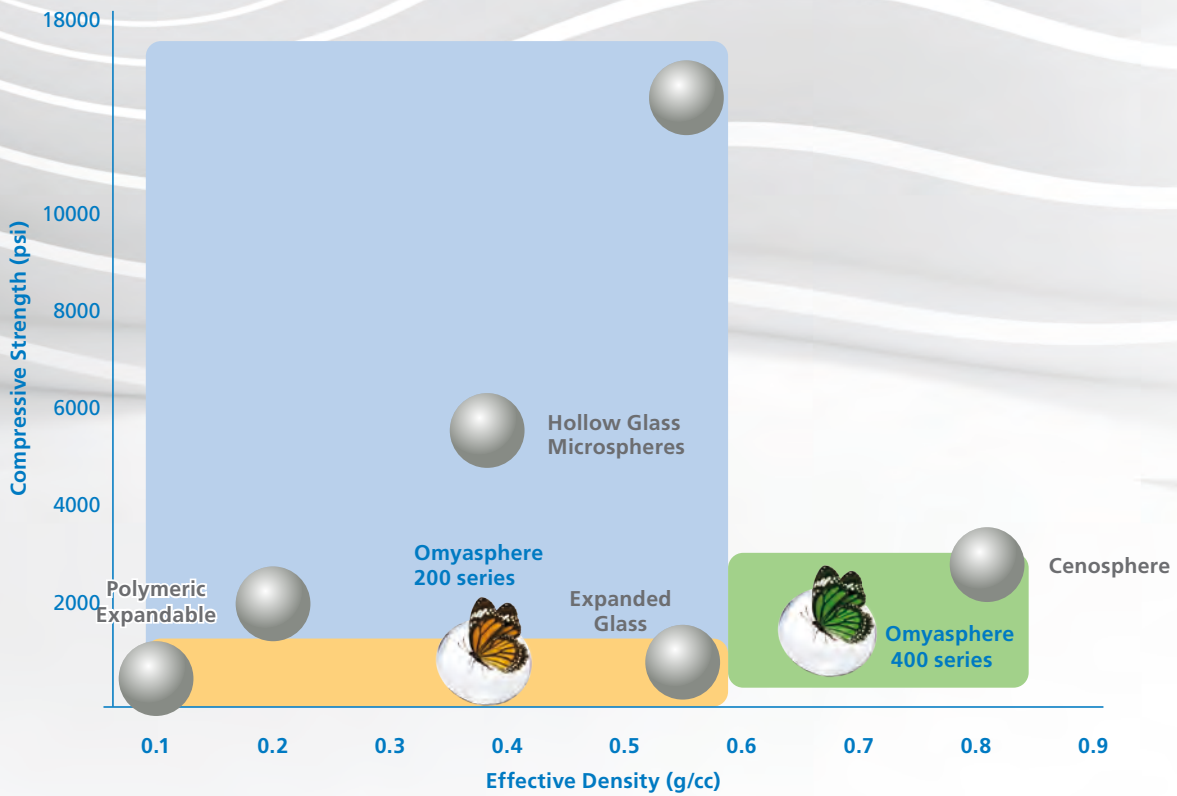

Positioning Omyasphere series

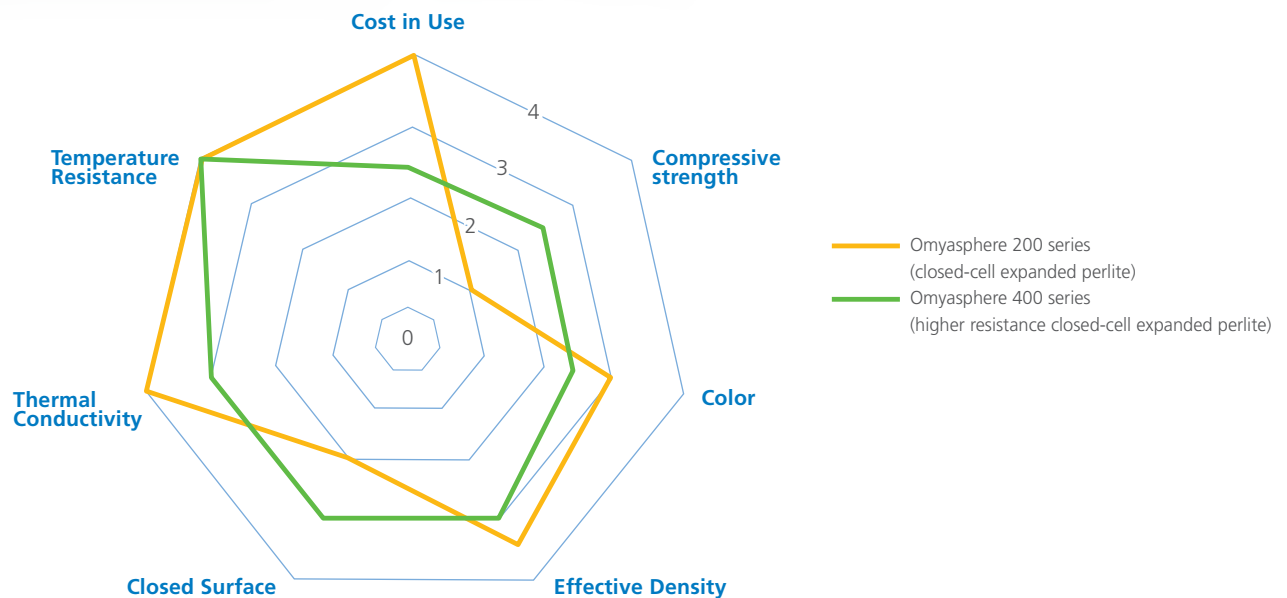

The different characteristics and performance attributes of the different Omyasphere solutions.

For each application, an Omyasphere solution

Omyasphere engineered minerals have been specifically developed to boost the products used by professionals in the building sector from all over the world.

Choose your Omyasphere grade according to your product and start boosting your performance today!

Main applications	Omyasphere 200 series	Omyasphere 400 series
Building Refurbishment & Finishing		
Spackles/Joint Compounds/Joint Fillers/Putties	● ●	
Acrylic Plasters	● ●	○
Gypsum Joint Filler / Mortars / Renders / ETICS	● ●	● ●
Ceramic Tile Adhesives	● ●	○
Self Levelling Underlayment / Tile Grouts		● ●
Panels & Boards	○	● ●
Concrete		
LW Concrete / Infra LW Concrete / 3D printing	○	● ●
Paints & Coatings		
Thermal Insulating Paints	○	
Roofing & Flooring		
Elastomeric Roof Coating / Cool Roof	● ●	
Waterproofing Asphalt Membranes / Sealers	● ●	● ●
Adhesives & Sealants		
PU / SMP / Silicone		○
Acrylic / Epoxy	○	○

● ● First choice ○ Second choice



Omya offers technical expertise, guideline formulations and related knowledge for specific applications.

Choose yours.

LW and infra-LW concrete



Elastomeric roof coatings



Waterproofing asphalt membranes



Joint filler/joint compounds/spackles



Thermal insulating paints



Tile adhesives



Panels and boards



Insulating mortars



Acrylic plasters



SMP adhesives & sealants



Self-levelling underlayment





Gypsum-based joint fillers



Omyasphere 200

Closed-cell expanded perlite

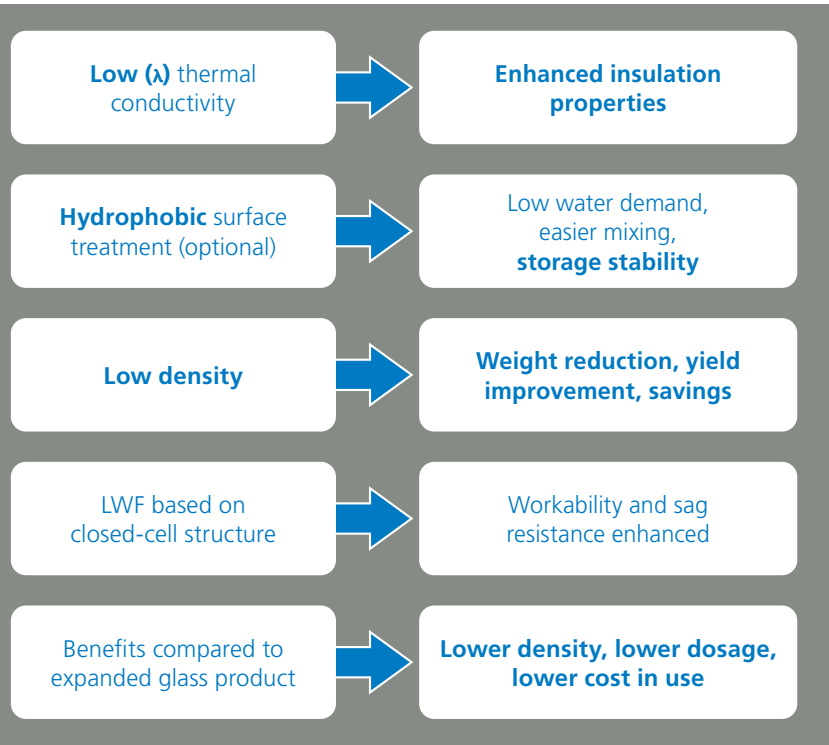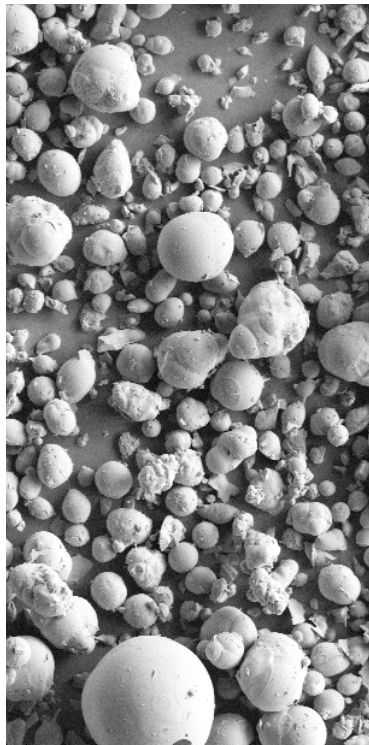

LWF = Lightweight Filler

Omyasphere 200: grade selection


Based on closed-cell expanded perlite, the Omyasphere 200 solution set is suggested for hand, roller, or brush applications and can even be used in low-pressure spraying operations (e.g. tile adhesives, joint compounds, renders, plasters, self-leveling, roof coatings, insulating paints). The Omyasphere 200 range offers a large portfolio of grades with a top cut ranging from 120 to 500 microns, and grades coated for improving hydrophobicity and enhancing stability over time in ready-to-use systems.

Properties	D50 (µm)	D98 (µm)	Coating	Bulk Density (kg/m ³)	Effective Density (g/cc)	Brightness L* (CIELAB color space)
Omyasphere 212 T – FQ	40	120	High level	130	0.30	90
Omyasphere 220 – FQ	80	200	No	120	0.41	86
Omyasphere 220 T - FQ	80	200	High level	120	0.27	86
Omyasphere 220 TM - FQ	80	200	Mid level	170	0.30	86
Omyasphere 227 - FQ	110	270	No	140	0.40	81
Omyasphere 227 T - FQ	110	270	High level	140	0.27	81
Omyasphere 227 TM - FQ	110	270	Mid level	140	0.27	81
Omyasphere 235 - FQ	130	350	No	100	0.38	81
Omyasphere 235 T - FQ	130	350	High level	100	0.23	81
Omyasphere 235 TM - FQ	130	350	Mid level	100	0.23	81

Omyasphere 400

The closed-cell expanded perlite with excellent resistance and minimum CO₂ emissions

Its outstandingly low CO₂ footprint allows significantly lower CO₂ footprint in your applications when compared to formulations using competitive lightweight fillers.

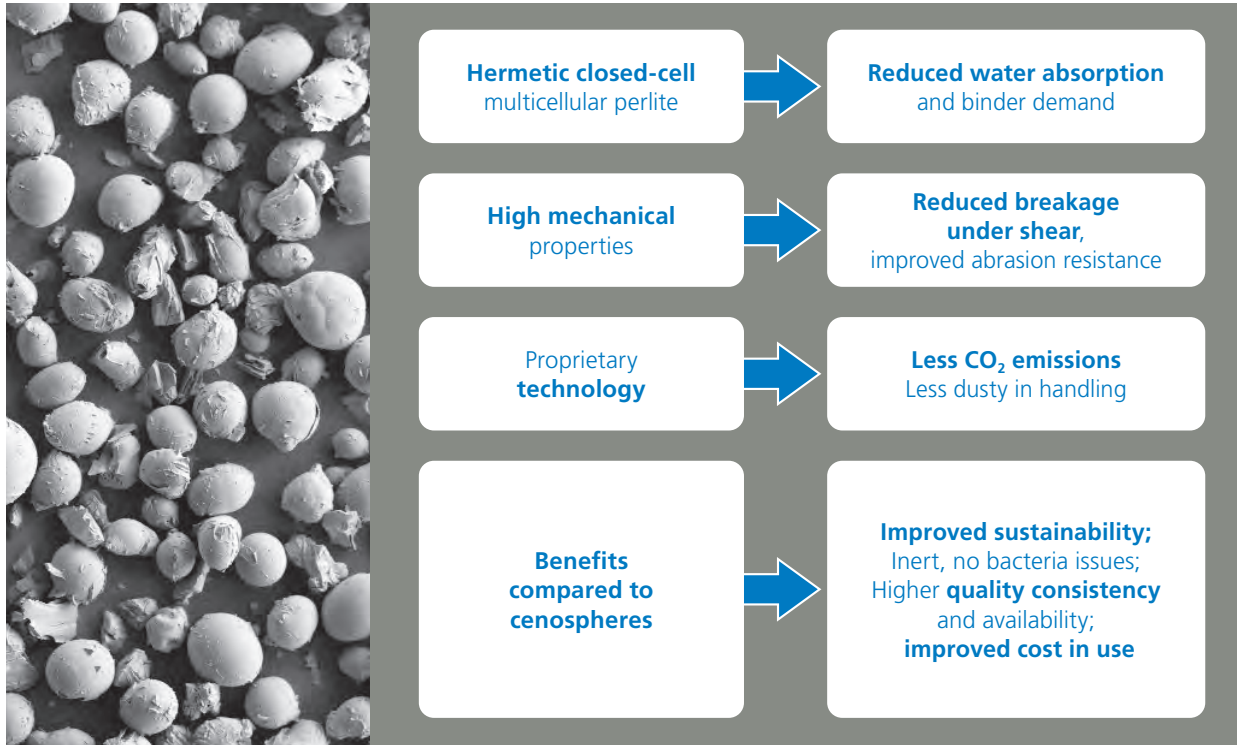

Omyasphere 400: select your ideal grade

Omyasphere 400 is based on controlled thermal expansion of the natural raw material perlite. All products belonging to the Omyasphere 400 family are manufactured using a patented, energy-efficient process to meet specific requirements of the building industry. Omyasphere 400 grades are characterized by higher strength closed-cell expanded perlites and are available at different density levels and in coarse, medium, fine and extra-fine particle sizes.

Properties	D10 (µm)	D50 (µm)	D90 (µm)	Bulk Density (kg/m ³)	Effective Density (g/cc)	Brightness L	Uniaxial strength (N/mm ²)
Omyasphere 412C-BU	450	750	1050	120	0.60	72	0.40
Omyasphere 427M-BU	150	235	350	270	0.45	85	1.50
Omyasphere 430M-BU	75	160	270	300	0.60	77	1.90
Omyasphere 435M-BU	115	185	275	350	0.70	83	3.91
Omyasphere 440M-BU	110	175	240	400	0.85	85	5.50
Omyasphere 430F-BU	70	105	135	300	0.60	86	3.20
Omyasphere 440F-BU	75	115	160	400	0.85	77	3.60
Omyasphere 450F-BU	75	105	140	500	0.95	74	6.60
Omyasphere 445X-BU	35	55	80	450	0.95	86	7.40

A global supply reliability:

Omysphere is reliably available around the world, sourced through our strong, experienced supply chain with efficient logistics available from our regional warehouse network.

One product range, countless solutions

Mirroring the variety of the construction market, Omysphere solutions can offer the best support for your applications and project requirements. We provide technical advice to customers worldwide to support the incorporation of Omysphere into your product formulation and to achieve the related benefits.

Handling and dosing recommendations:

All information about the Omysphere series are available and can be shared upon request to: lightweightfillers@omya.com

They include guidance for:

- Unloading, conveying and dosing instructions from bulk, big-bags and paper-bags.
- Mixing and processing Omyspheres into specific applications.

Omysphere is a registered trademark of Omya AG in the European Union and multiple other countries.

Omya International AG, Baslerstrasse 42, CH-4665 Oftringen, email: lightweightfillers@omya.com

Omya has taken every possible care to ensure that the information herein is correct in all aspects. However, Omya cannot be held responsible for any errors or omissions which may be found herein, nor will it accept responsibility for any use which may be of the information, the same having been given in good faith, but without legal responsibility. This information does not give rise to any warranties of any kind, expressed or implied, including fitness for purpose and non-infringement of intellectual property. The technical information presented comprises typical data and should not be taken as representing a specification. Omya reserves the right to change any of the data without notice.

Source: Omya International (2024/03) EN

